

# DOUBLE OVEN LOW PROFILE ULTRA PRECISION OCXO MV180

## Features:

- Low sensitivity to rapid changes of ambient temperature
- Low profile package with the height of 19 mm
- High stability vs. temperature: up to  $\pm 1 \times 10^{-10}$
- Available as RoHS

Power supply	5V	Output	SIN	Package type	Z19	51.3x51.3x19 mm
	12V		HCMOS		Y19	51.3x41.3x19 mm

## ORDERING GUIDE: MV180-B 02 E-12V-SIN-Z19-10.0 MHz

Availability of certain stability vs. operating temperature		$\pm 1 \times 10^{-9}$	$\pm 5 \times 10^{-10}$	$\pm 3 \times 10^{-10}$	$\pm 2 \times 10^{-10}$	$\pm 1 \times 10^{-10}$
		1	05	03	02	01
A	0...+55 °C	A	A	A	A	A
B	- 10...+60 °C	A	A	A	A	A
C	- 20...+70 °C	A	A	A	A	C
D	- 40...+70 °C	A	A	A	C	NA



Availability of certain aging values for certain frequencies		Standard frequencies			
		5.0 MHz	8.192 MHz	10.0 MHz	16.384 MHz
F	$\pm 5 \times 10^{-8}$ /year	A	A	A	A
E	$\pm 3 \times 10^{-8}$ /year	A	A	A	A
D	$\pm 2 \times 10^{-8}$ /year	A	C	A	C
C	$\pm 1 \times 10^{-8}$ /year	C	NA	C	NA

A – available, NA – not available, C – consult factory

A – available, NA – not available, C – consult factory

For other temperature ranges see designation in the order guide

## Package drawings:

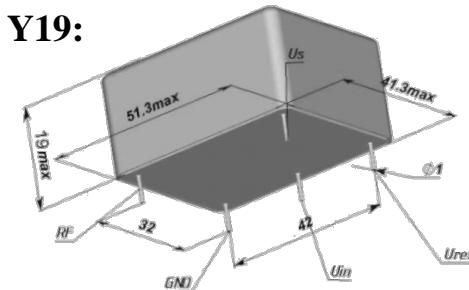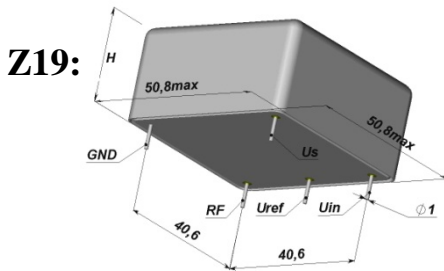

Short term stability (Allan deviation) per 1 sec, for 5 MHz and 10 MHz	$< 2 \times 10^{-12}$	
Frequency stability vs. load changes	$< \pm 1 \times 10^{-10}$	
Frequency stability vs. power supply changes	$< \pm 1 \times 10^{-10}$	
Warm-up time with accuracy of $< \pm 1 \times 10^{-8}$ @ 25°C	$< 10$ min	
Power supply (Us)	12V $\pm 5\%$	5V $\pm 5\%$
Steady state current consumption @ 25°C	$< 250$ mA	$< 600$ mA
Peak current consumption during warm-up: For "D" temperature range:	$< 700$ mA	$< 1.4$ A
	$< 900$ mA	Consult
Frequency pulling range	$> \pm 3 \times 10^{-7}$	
with external control voltage range (Uin)	0...+5 V	0...+4 V
Reference voltage (Uref)	+5 V	+4 V
Output	SIN	
	5 V	12 V
Level, dBm	+5 $\pm 2$	+7 $\pm 2$
Load	50 Ohm $\pm 10\%$	10kOhm/30pF
Harmonic and subharmonics suppression	$> 35$ dBc	
Phase noise, typical, dBc/Hz	for 10 MHz	
	for 5 MHz	
1 Hz	-100	-105
10 Hz	-125	-130
100 Hz	-140	-145
1000 Hz	-145	-150
10000 Hz	-150	-155

## ADDITIONAL NOTES:

- Showed values of frequency stability vs. temperature usually are tested in still air test conditions. Please inform factory about different conditions in operation to provide appropriate tests.
- Please consult factory for daily aging values. Normally typical correspondence of daily aging per day to aging per year is as following:  $\pm 5 \times 10^{-8}$ /year -  $\pm 5 \times 10^{-10}$ /day;  $\pm 3 \times 10^{-8}$ /year -  $\pm 3 \times 10^{-10}$ /day;  $\pm 2 \times 10^{-8}$ /year -  $\pm 2 \times 10^{-10}$ /day;  $\pm 1 \times 10^{-8}$ /year -  $\pm 1 \times 10^{-10}$ /day
- Please mention RoHS requirement (if any) while requesting for quote or while placing PO.
- For non standard operating temperature ranges please use the following two letters designations (first letter for the lower limit, second letter for the upper limit), °C:

Vibrations:	
Frequency range	10-500 Hz
Acceleration	5g

Shock:	
Acceleration	15 g
Duration	2 $\pm 0.5$ ms
Storage temperature range	-55...+80 °C

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	U	W	X
-60	-55	-50	-45	-40	-30	-20	-10	0	+10	+30	+40	+45	+50	+55	+60	+65	+70	+75	+80	+85