

LOW POWER CONSUMPTION OCXO WITH EXCELLENT SHORT TERM STABILITY AND EXTREMELY LOW PHASE NOISE MV83M

Features:

- Excellent short-term stability: up to $<5 \times 10^{-13}$ per 1 sec
- High stability: up to $\pm 5 \times 10^{-9}$
- Excellent phase noise
- Low power consumption
- Low aging: up to $\pm 3 \times 10^{-8}$ /year
- Standard frequencies: 5.0 & 10.0 MHz

Aging		Frequency	
G	$\pm 1 \times 10^{-7}$ /year	5.0 MHz	Short term stability (Allan deviation) per 1 sec.
F	$\pm 5 \times 10^{-8}$ /year	10.0 MHz	
E	$\pm 3 \times 10^{-8}$ /year		
		05	$< 5 \times 10^{-13}$
		1	$< 1 \times 10^{-12}$
		2	$< 2 \times 10^{-12}$
		3	$< 3 \times 10^{-12}$

ORDERING GUIDE: MV83M-C 10 F-5.0MHz-2-LN


Availability of certain stability vs. operating temperature range		Stability					
		$\pm 5 \times 10^{-8}$	$\pm 3 \times 10^{-8}$	$\pm 2 \times 10^{-8}$	$\pm 1 \times 10^{-8}$	$\pm 7.5 \times 10^{-9}$	$\pm 5 \times 10^{-9}$
	Temperature Range	50	30	20	10	7	5
A	0...+55°C	A	A	A	A	A	A
B	-10...+60°C	A	A	A	A	C	C
C	-20...+70°C	A	A	A	A	NA	NA
D	-40...+70°C	A	A	A	C	NA	NA

A – available, NA – not available, C – consult factory.

For other temperature ranges see designation at the end of Data Sheet

Output	SIN (5 MHz)	SIN (10 MHz)
Level	>225 mV (0dBm)	225 (0dBm)
Load	50 Ohm $\pm 5\%$	50 Ohm
Harmonic	<-30dBc	<-30dBc
Sub Harmonic	-	<-35dBc
Phase noise typical, dBc/Hz	-	LN
1Hz	-100	-115
10 Hz	-135	-140
100 Hz	-150	-150
1000 Hz	-155	-155
10000 Hz	-158	-158

Package drawing:

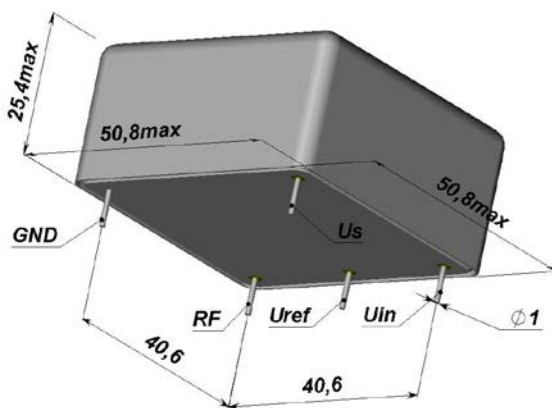

Frequency stability vs. load changes	$< \pm 1 \times 10^{-9}$
Frequency stability vs. power supply changes	$< \pm 1 \times 10^{-9}$
Power supply (Us)	12V $\pm 5\%$
Peak current consumption during warm-up	<400 mA
Steady state current consumption	<55 mA
Warm-up time within $\pm 5 \times 10^{-8}$ @ +25 °C	<5min
Frequency pulling range	$> \pm 3 \times 10^{-7}$
with external voltage range (Uin)	+1...+8V
with external potentiometer	20 kOhm
Reference voltage output (Uref)	+8.2V
Slope	Positive

* Consult factory

Mechanical characteristics:

Storage temperature range	-55...+85°C
Vibrations	10-500 Hz, 10 g
Shock	100 g
Humidity @ +35°C	98%

Additional notes:

- Please consult factory for daily aging values. Normally typical correspondence of daily aging per day to aging per year is as following:
 $\pm 2 \times 10^{-7}$ /year – $\pm 2 \times 10^{-9}$ /day; $\pm 1 \times 10^{-7}$ /year – $\pm 1 \times 10^{-9}$ /day; $\pm 5 \times 10^{-8}$ /year – $\pm 5 \times 10^{-10}$ /day; $\pm 3 \times 10^{-8}$ /year – $\pm 3 \times 10^{-10}$ /day.
- For non standard operating temperature ranges please use the following two letters designations (first letter for the lower limit, second letter for the upper limit), °C:

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	U	W	X
-60	-55	-50	-45	-40	-30	-20	-10	0	+10	+30	+40	+45	+50	+55	+60	+65	+70	+75	+80	+85